

## Chapter 6: Multilayer Neural Networks

- Introduction
- Feedforward Operation and Classification
- Backpropagation Algorithm




All materials used in this course were taken from the textbook "*Pattern Classification*" by Duda et al., John Wiley & Sons, 2001 with the permission of the authors and the publisher

## Introduction

- Goal: Classify objects by learning nonlinearity
  - There are many problems for which linear discriminants are insufficient for minimum error
  - In previous methods, the central difficulty was the choice of the appropriate nonlinear functions
  - A “brute” approach might be to select a complete basis set such as all polynomials; such a classifier would require too many parameters to be determined from a limited number of training samples

- There is no automatic method for determining the nonlinearities when no information is provided to the classifier
- In using the multilayer Neural Networks, the form of the nonlinearity is learned from the training data

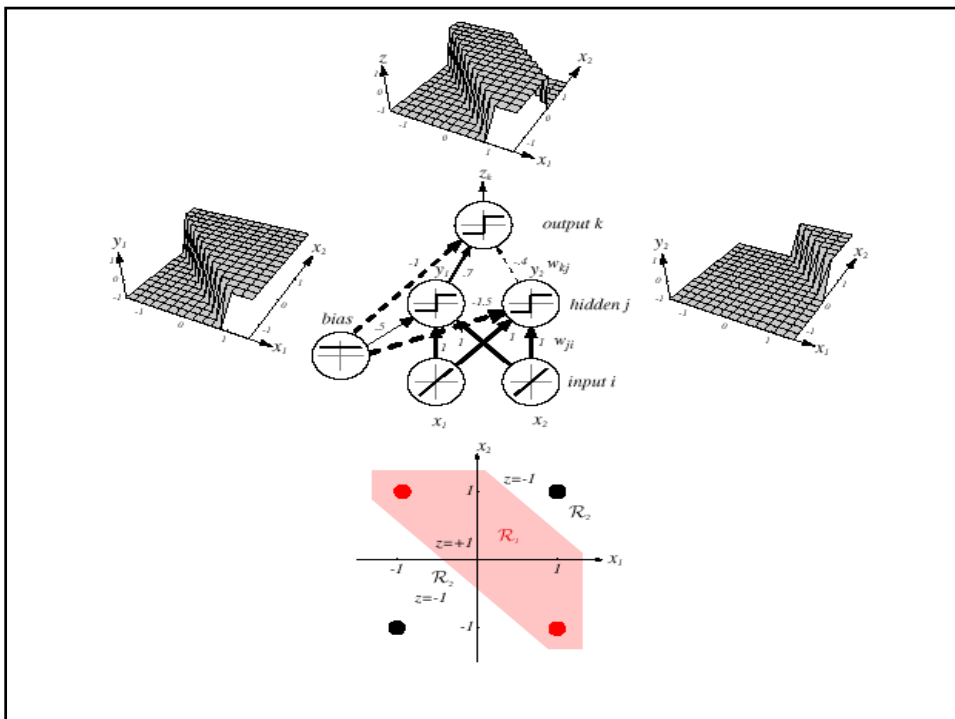

## Feedforward Operation and Classification

- A three-layer neural network consists of an input layer, a hidden layer and an output layer interconnected by modifiable weights represented by links between layers

**FIGURE 6.1.** The two-bit parity or exclusive-OR problem can be solved by a three-layer network. At the bottom is the two-dimensional feature  $x_1x_2$ -space, along with the four patterns to be classified. The three-layer network is shown in the middle. The input units are linear and merely distribute their feature values through multiplicative weights to the hidden units. The hidden and output units here are linear threshold units, each of which forms the linear sum of its inputs times their associated weight to yield  $net$ , and emits a +1 if this  $net$  is greater than or equal to 0, and -1 otherwise, as shown by the graphs. Positive or "excitatory" weights are denoted by solid lines, negative or "inhibitory" weights by dashed lines; each weight magnitude is indicated by the line's thickness, and is labeled. The single output unit sums the weighted signals from the hidden units and bias to form its  $net$ , and emits a +1 if its  $net$  is greater than or equal to 0 and emits a -1 otherwise. Within each unit we show a graph of its input-output or activation function— $f(net)$  versus  $net$ . This function is linear for the input units, a constant for the bias, and a step or sign function elsewhere. We say that this network has a 2-2-1 fully connected topology, describing the number of units (other than the bias) in successive layers. From: Richard O. Duda, Peter E. Hart, and David G. Stork, *Pattern Classification*. Copyright © 2001 by John Wiley & Sons, Inc.

- A single “bias unit” is connected to each unit other than the input units

- Net activation:

$$\mathbf{net}_j = \sum_{i=1}^d \mathbf{x}_i \mathbf{w}_{ji} + \mathbf{w}_{j0} = \sum_{i=0}^d \mathbf{x}_i \mathbf{w}_{ji} \equiv \mathbf{w}_j^t \cdot \mathbf{x},$$

where the subscript  $i$  indexes units in the input layer,  $j$  in the hidden;  $w_{ji}$  denotes the input-to-hidden layer weights at the hidden unit  $j$ . (In neurobiology, such weights or connections are called “synapses”)

- Each hidden unit emits an output that is a nonlinear function of its activation, that is:  $y_j = f(\mathbf{net}_j)$

Figure 6.1 shows a simple threshold function

$$\mathbf{f}(\mathbf{net}) = \mathbf{sgn}(\mathbf{net}) \equiv \begin{cases} 1 & \text{if } \mathbf{net} \geq 0 \\ -1 & \text{if } \mathbf{net} < 0 \end{cases}$$

- The function  $f(\cdot)$  is also called the activation function or “nonlinearity” of a unit. There are more general activation functions with desirable properties
- Each output unit similarly computes its net activation based on the hidden unit signals as:

$$\mathbf{net}_k = \sum_{j=1}^{n_H} \mathbf{y}_j \mathbf{w}_{kj} + \mathbf{w}_{k0} = \sum_{j=0}^{n_H} \mathbf{y}_j \mathbf{w}_{kj} = \mathbf{w}_k^t \cdot \mathbf{y},$$

where the subscript  $k$  indexes units in the output layer and  $n_H$  denotes the number of hidden units

- More than one output are referred  $z_k$ . An output unit computes the nonlinear function of its net, emitting

$$z_k = f(\text{net}_k)$$

- In the case of  $c$  outputs (classes), we can view the network as computing  $c$  discriminants functions  $z_k = g_k(x)$  and classify the input  $x$  according to the largest discriminant function  $g_k(x) \quad \forall k = 1, \dots, c$
- The three-layer network with the weights listed in fig. 6.1 solves the XOR problem

- The hidden unit  $y_1$  computes the boundary:

$$x_1 + x_2 + 0.5 = 0 \begin{cases} \geq 0 \Rightarrow y_1 = +1 \\ < 0 \Rightarrow y_1 = -1 \end{cases}$$

- The hidden unit  $y_2$  computes the boundary:

$$x_1 + x_2 - 1.5 = 0 \begin{cases} \leq 0 \Rightarrow y_2 = +1 \\ < 0 \Rightarrow y_2 = -1 \end{cases}$$

- The final output unit emits  $z_1 = +1 \Leftrightarrow y_1 = +1$  and  $y_2 = +1$   
 $z_k = y_1$  and not  $y_2 = (x_1 \text{ or } x_2)$  and not  $(x_1 \text{ and } x_2) = x_1 \text{ XOR } x_2$   
 which provides the nonlinear decision of fig. 6.1

- General Feedforward Operation – case of  $c$  output units

$$\mathbf{g}_k(\mathbf{x}) \equiv z_k = f\left(\sum_{j=1}^{n_H} \mathbf{w}_{kj} f\left(\sum_{i=1}^d \mathbf{w}_{ji} x_i + \mathbf{w}_{j0}\right) + \mathbf{w}_{k0}\right) \quad (1)$$

$(k = 1, \dots, c)$

- Hidden units enable us to express more complicated nonlinear functions and thus extend the classification
- The activation function does not have to be a sign function, it is often required to be continuous and differentiable
- We can allow the activation in the output layer to be different from the activation function in the hidden layer or have different activation for each individual unit
- We assume for now that all activation functions to be identical

- Expressive Power of multi-layer Networks

Question: Can every decision be implemented by a three-layer network described by equation (1) ?

Answer: Yes (due to A. Kolmogorov)


“Any continuous function from input to output can be implemented in a three-layer net, given sufficient number of hidden units  $n_H$ , proper nonlinearities, and weights.”

$$\mathbf{g}(\mathbf{x}) = \sum_{j=1}^{2n+1} \delta_j(\sum \beta_{ij}(\mathbf{x}_i)) \quad \forall \mathbf{x} \in I^n (I = [0,1]; n \geq 2)$$

for properly chosen functions  $\delta_j$  and  $\beta_{ij}$

- Each of the  $2n+1$  hidden units  $\delta_j$  takes as input a sum of  $d$  nonlinear functions, one for each input feature  $x_i$
- Each hidden unit emits a nonlinear function  $\delta_j$  of its total input
- The output unit emits the sum of the contributions of the hidden units


Unfortunately: Kolmogorov's theorem tells us very little about how to find the nonlinear functions based on data; this is the central problem in network-based pattern recognition

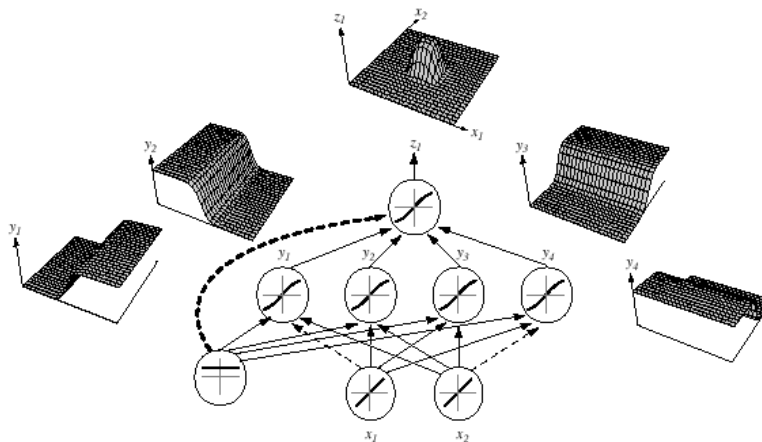

**FIGURE 6.2.** A 2-4-1 network (with bias) along with the response functions at different units; each hidden output unit has sigmoidal activation function  $f(\cdot)$ . In the case shown, the hidden unit outputs are paired in opposition thereby producing a “bump” at the output unit. Given a sufficiently large number of hidden units, any continuous function from input to output can be approximated arbitrarily well by such a network. From: Richard O. Duda, Peter E. Hart, and David G. Stork, *Pattern Classification*. Copyright © 2001 by John Wiley & Sons, Inc.

## Backpropagation Algorithm

- Any function from input to output can be implemented as a three-layer neural network
- These results are of greater theoretical interest than practical, since the construction of such a network requires the nonlinear functions and the weight values which are unknown!

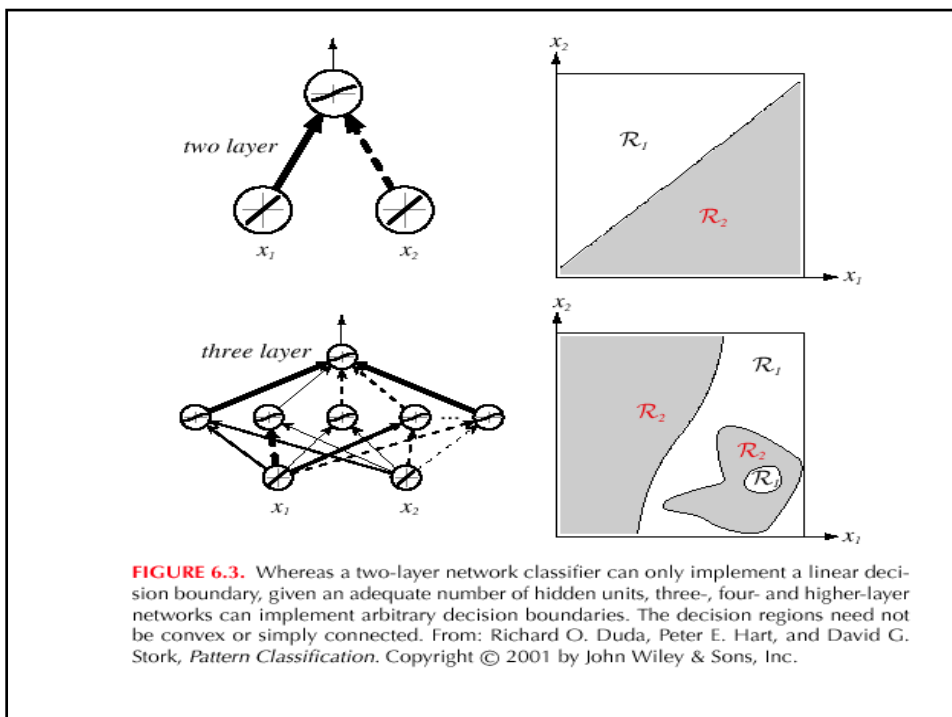




- Our goal now is to set the interconnexion weights based on the training patterns and the desired outputs
- In a three-layer network, it is a straightforward matter to understand how the output, and thus the error, depend on the hidden-to-output layer weights
- The power of backpropagation is that it enables us to compute an effective error for each hidden unit, and thus derive a learning rule for the input-to-hidden weights, this is known as:

The credit assignment problem

- Network have two modes of operation:
  - Feedforward  
The feedforward operations consists of presenting a pattern to the input units and passing (or feeding) the signals through the network in order to get outputs units (no cycles!)
  - Learning  
The supervised learning consists of presenting an input pattern and modifying the network parameters (weights) to reduce distances between the computed output and the desired output

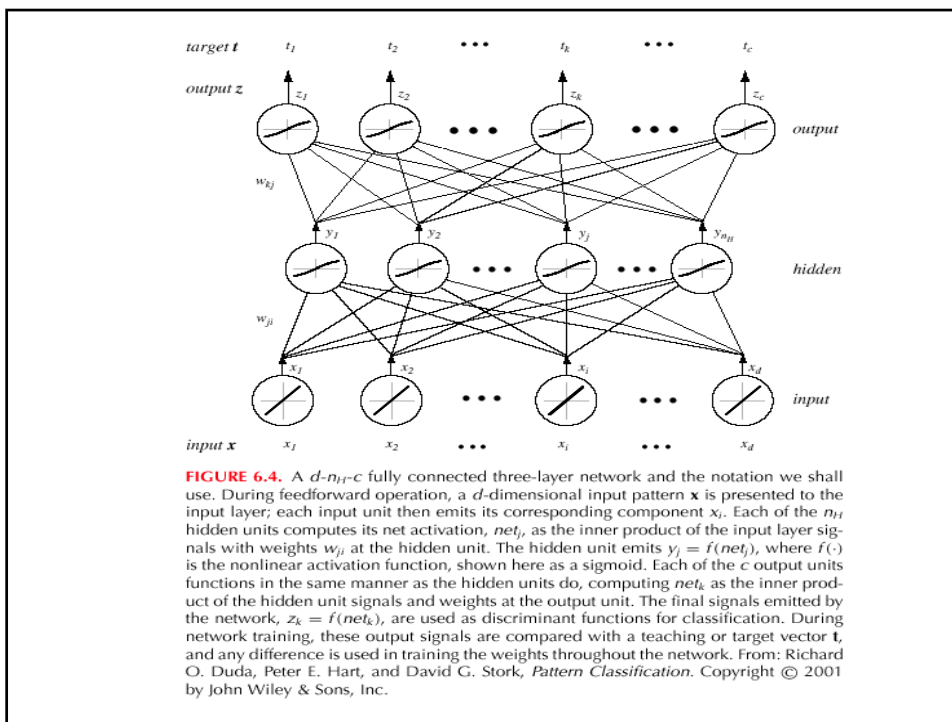

● Network Learning

– Let  $t_k$  be the  $k$ -th target (or desired) output and  $z_k$  be the  $k$ -th computed output with  $k = 1, \dots, c$  and  $\mathbf{w}$  represents all the weights of the network

– The training error: 
$$\mathbf{J}(\mathbf{w}) = \frac{1}{2} \sum_{k=1}^c (t_k - z_k)^2 = \frac{1}{2} \|\mathbf{t} - \mathbf{z}\|^2$$

– The backpropagation learning rule is based on gradient descent

- The weights are initialized with pseudo-random values and are changed in a direction that will reduce the error:

$$\Delta \mathbf{w} = -\eta \frac{\partial \mathbf{J}}{\partial \mathbf{w}}$$

where  $\eta$  is the **learning rate** which indicates the relative size of the change in weights

$$w(m+1) = w(m) + \Delta w(m)$$

where  $m$  is the  $m$ -th pattern presented

- Error on the hidden-to-output weights

$$\frac{\partial J}{\partial w_{kj}} = \frac{\partial J}{\partial \text{net}_k} \cdot \frac{\partial \text{net}_k}{\partial w_{kj}} = -\delta_k \frac{\partial \text{net}_k}{\partial w_{kj}}$$

where the sensitivity of unit  $k$  is defined as:  $\delta_k = -\frac{\partial J}{\partial \text{net}_k}$

and describes how the overall error changes with the activation of the unit's net

$$\delta_k = -\frac{\partial J}{\partial \text{net}_k} = -\frac{\partial J}{\partial z_k} \cdot \frac{\partial z_k}{\partial \text{net}_k} = (t_k - z_k) f'(\text{net}_k)$$

Since  $\text{net}_k = w_k^t \cdot y$  therefore:

$$\frac{\partial \text{net}_k}{\partial w_{kj}} = y_j$$

Conclusion: the weight update (or learning rule) for the hidden-to-output weights is:

$$\Delta w_{kj} = \eta \delta_k y_j = \eta (t_k - z_k) f'(\text{net}_k) y_j$$

- Error on the input-to-hidden units

$$\frac{\partial J}{\partial w_{ji}} = \frac{\partial J}{\partial y_j} \cdot \frac{\partial y_j}{\partial \text{net}_j} \cdot \frac{\partial \text{net}_j}{\partial w_{ji}}$$

$$\begin{aligned} \text{However, } \frac{\partial J}{\partial y_j} &= \frac{\partial}{\partial y_j} \left[ \frac{1}{2} \sum_{k=1}^c (t_k - z_k)^2 \right] = - \sum_{k=1}^c (t_k - z_k) \frac{\partial z_k}{\partial y_j} \\ &= - \sum_{k=1}^c (t_k - z_k) \frac{\partial z_k}{\partial \text{net}_k} \cdot \frac{\partial \text{net}_k}{\partial y_j} = - \sum_{k=1}^c (t_k - z_k) f'(\text{net}_k) w_{kj} \end{aligned}$$

Similarly as in the preceding case, we define the sensitivity for a hidden unit:

$$\delta_j \equiv f'(\text{net}_j) \sum_{k=1}^c w_{kj} \delta_k$$

which means that: “The sensitivity at a hidden unit is simply the sum of the individual sensitivities at the output units weighted by the hidden-to-output weights  $w_{kj}$ ; all multiplied by  $f'(\text{net}_j)$ ”

Conclusion: The learning rule for the input-to-hidden weights is:

$$\Delta w_{ji} = \eta x_i \delta_j = \eta \underbrace{\left[ \sum w_{kj} \delta_k \right]}_{\delta_j} f'(\text{net}_j) x_i$$

– Starting with a pseudo-random weight configuration, the stochastic backpropagation algorithm can be written as:

```

Begin  initialize  nH; w, criterion θ, η, m ← 0
do m ← m + 1
  |   xm ← randomly chosen pattern
  |   wji ← wji + ηδjxi; wkj ← wkj + ηδkyj
until ||∇J(w)|| < θ
return w

End

```

– Stopping criterion

- The algorithm terminates when the change in the criterion function  $J(w)$  is smaller than some preset value  $\theta$
- There are other stopping criteria that lead to better performance than this one
- So far, we have considered the error on a single pattern, but we want to consider an error defined over the entirety of patterns in the training set
- The total training error is the sum over the errors of  $n$  individual patterns


$$J = \sum_{p=1}^n J_p \quad (1)$$

– Stopping criterion (cont.)

- A weight update may reduce the error on the single pattern being presented but can increase the error on the full training set
- However, given a large number of such individual updates, the total error of equation (1) decreases

### ● Learning Curves

- Before training starts, the error on the training set is high; through the learning process, the error becomes smaller
- The error per pattern depends on the amount of training data and the expressive power (such as the number of weights) in the network
- The average error on an independent test set is always higher than on the training set, and it can decrease as well as increase
- A validation set is used in order to decide when to stop training ; we do not want to overfit the network and decrease the power of the classifier generalization
  - “we stop training at a minimum of the error on the validation set”

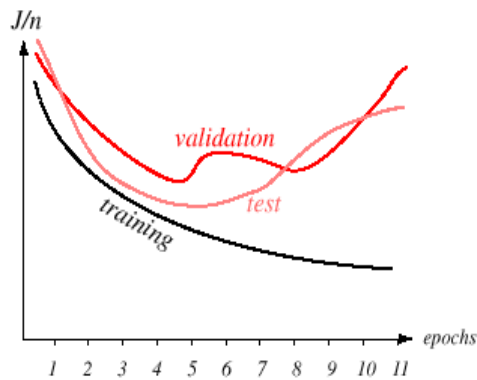

**FIGURE 6.6.** A learning curve shows the criterion function as a function of the amount of training, typically indicated by the number of epochs or presentations of the full training set. We plot the average error per pattern, that is,  $1/n \sum_{p=1}^n J_p$ . The validation error and the test or generalization error per pattern are virtually always higher than the training error. In some protocols, training is stopped at the first minimum of the validation set. From: Richard O. Duda, Peter E. Hart, and David G. Stork, *Pattern Classification*. Copyright © 2001 by John Wiley & Sons, Inc.

## EXERCISES

- Exercise #1.  
Explain why a MLP (multilayer perceptron) does not learn if the initial weights and biases are all zeros
- Exercise #2. (#2 p. 344)